

## ELM Series (150 scfm - 12000 scfm)




### High Efficiency Mist Eliminator Air Filters

#### Applications include

- Capturing oil fog, mist, or smoke from exhaust and pressure unloading vents on oil flooded compressors, vacuum pumps and blowers
- Any application requiring Low Delta P coalescing of large air volumes
- Vacuum Freeze Drying
- Vacuum Out - Gasing and Vacuum Coating
- Food Processing
- Nailers/Staplers
- Industrial Vacuum Processes
- Cement & Paper Processing

#### Design

- Mist Eliminators are designed to meet the demand for:
  - Efficient removal of oil-mist carryover from piston or oil flooded rotary compressors
  - Long service life
  - Strength to withstand strenuous operating conditions
  - Protection from oil slugs or compressor Air/ Oil separator failure

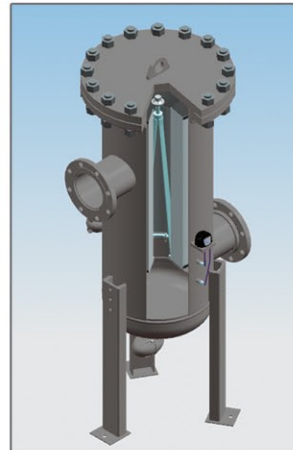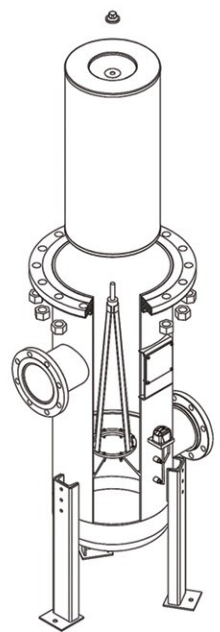

1

#### Features

- Very Low pressure drop
- Large oil catching efficiency
- Easy field cleaning
- Positive sealing O-rings
- Temperature (continuous) 36°F min. 176°F max.
- Auto Float Drain is Standard
- Multiple drain Style Options Available
- Pressure Rating of 200 psi
- Removal of particles down to 0.01 micron including coalesced liquid water and oil providing a maximum remaining oil aerosol content of 0.01 ppm
- Increased surface area in a given volume allows low velocity separation of ultra fine oil mist
- Elements are grounded to canister minimizing static electricity problems

#### Mist Eliminator Element


- Ultra low pressure drop reduces energy costs.
- Positive gasket seals eliminate media bypass
- Filter change out differential 2.5 psi
- True Air / Oil Separator
- Long service life



# High Efficiency Mist Eliminator Air Filters

## Technical specifications

Model	Drain Port Size (NPT)	Inlet/Outlet Port Size (NPT)	Flow Rate (scfm)	Max. working pressure (psi)	Housing Dimensions (inch)							
					A	B	C	D	ØE	ØF	G	H
ELM-US-150	1/2"	2"	150	200	19.7"	39.87"	8.34"	18.2"	17"	4	12	13"
ELM-US-300	1/2"	2"	300	200	19.7"	43.87"	8.34"	22.2"	17"	4	16	17"
ELM-US-600	1/2"	2"	600	200	19.7"	57.87"	8.34"	36.2"	17"	4	30	31"
ELM-US-800	1/2"	3"	800	200	19.7"	65.27"	11.1"	42.8"	17"	4	36	37"
ELM-US-1200	1/2"	3"	1200	200	23.6"	60.17"	11.15"	36.75"	19"	4	30	31"
ELM-US-1600	1/2"	3"	1600	200	23.6"	66.17"	11.15"	42.85"	19"	4	36	37"
ELM-US-2100	1/2"	4"	2100	200	27.56"	62.42"	13.3"	37.5"	22.3"	5	30	31"
ELM-US-2750	1/2"	4"	2750	200	27.56"	68.42"	13.3"	43.43"	22.3"	5	36	37"
ELM-US-4200	1/2"	6"	4200	200	31.5"	65.67"	15.4"	38.63"	24.3"	7.1	30	31"
ELM-US-6000	1/2"	6"	6000	200	31.5"	75.67"	15.4"	48.67"	24.3"	7.1	37.4	41"
ELM-US-8000	1/2"	8"	8000	200	33.5"	79.42"	16.3"	50.2"	26.3"	9.17	40	41"
ELM-US-10000	1/2"	10"	10000	200	39.4"	83.47"	18.9"	51.55"	30.3"	13.2	40	41"
ELM-US-12000	1/2"	12"	12000	200	39.4"	105.92"	19.65"	72.8"	30.3"	13.2	60	61"

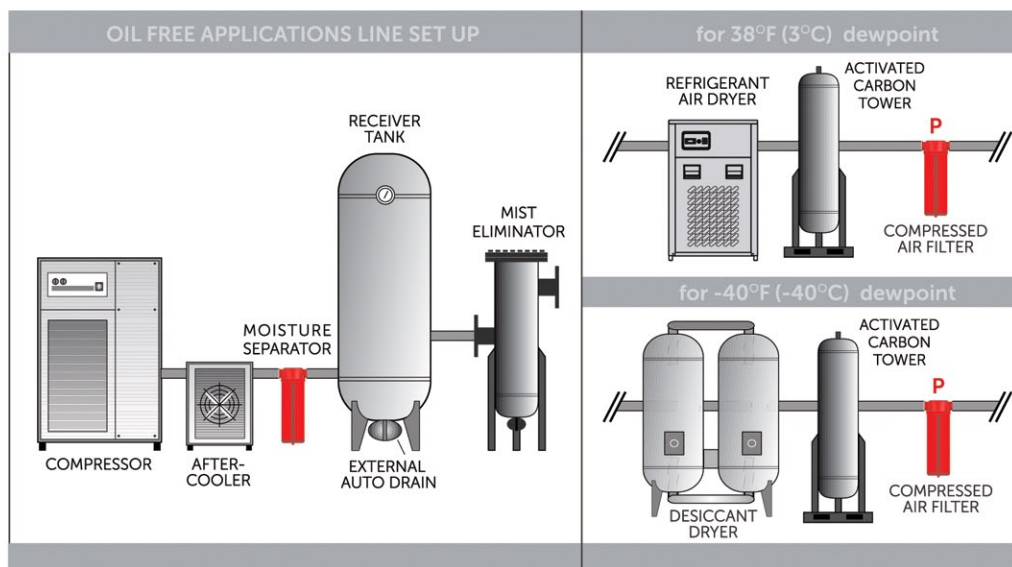

## Correction Factor

Operating Pressure (barg)	1	3	5	7	9	11	13	14
PSIG	15	44	73	100	130	160	189	200
Correction Factor	0.5	0.71	0.87	1	1.12	1.22	1.32	1.38

For maximum flow rate, multiply model flow rate show in the above table by the correction factor corresponding to the working pressure.

DRAIN TYPE
Electro - adjustable
External float type
Zero-loss Drain
Manual

**Correction Sample:**  
 if an compressor delivers 1300 scfm at 130 psi please choose your Filter model as follow:  
 $1300 \text{ scfm} / 1.12 = 1160 \text{ scfm}$   
 your model is ELM-US-1200

